




HIGH WALL R-32 60HZ
YHF/GF 12~24 ZHMDHUORX
3.5~7.0 kW Cooling Only / Heat Pump

Indoor Unit

- Modern, compact design
- Efficient cooling/heating
- Auto restart
- Low noise
- Comfortable sleep
- Golden fin
- 3D air flow(Optional)

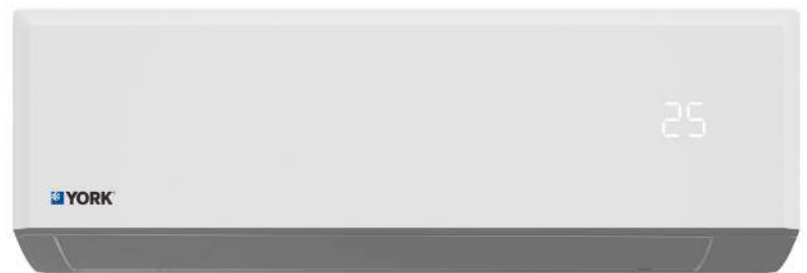

Remote Control

- 4 / 5 operation modes
- Sleep mode
- On/off timers
- Turbo cool/heat settings
- Hidden display



Condensing Unit

- Quiet operation
- Convenient installation
- Easy maintenance
- Golden fin



The YORK® line of Mini Splits Air Conditioners includes a wide range of sizes to give you more flexibility in your product offering. Each model is designed to provide comfort and efficiency, in an easy-to-operate unit and the sleek design fits a variety of spaces, whether it's in a home or office. Models meet the highest energy efficiency ratings, so less energy is consumed without sacrificing comfort and performance. Both the condensing units and indoor units are engineered for quiet operation. And comfort control settings are easily changed with the touch of a button on the remote control.

Features and Benefits



R-32

Environmentally-friendly refrigerant cools and heats more efficiently without destroying the ozone layer.



Self Diagnosis

Clearly displayed failure codes allow for quicker troubleshooting and easier maintenance.



24-Hour Timer

Allows programmed start times up to 24 hours in advance for flexible and more convenient operation.



3-Minute Protection

A 3-minute delay before the compressor will restart helps avoid compressor damage and work time.



Multi-Speed Fan

Multi-speed fan helps satisfy various airflow requirements.



Auto Restart

Unit is automatically returned to previous operating conditions after a power outage, for simplified operation.

Golden Fin

The unique anti-corrosive golden coating on aluminum fin of the heat exchangers can withstand the salty air, rain and other corrosive elements. It also effectively prevents bacteria from breeding and improves heat efficiency.



HIGH WALL R-32 60HZ

Specification

YORK Set Model			YHFF12ZHMDDHUORX	YHFF18ZHMDDHUORX	YHFF24ZHMDDHUORX
YORK Outdoor Model			YHFF12YHMDHUO-X	YHFF18YHMDHUO-X	YHFF24YHMDHUO-X
YORK Indoor Model			YHFF12XHMDHU-RX	YHFF18XHMDHU-RX	YHFF24XHMDHU-RX
Power supply		V/Ph/Hz	230/1/60	230/1/60	230/1/60
Power supply by		Side	Indoor	Indoor	Indoor
Cooling	Capacity	Btu/h	11,942	18,084	22,179
	Capacity	W	3,500	5,300	6,500
	Power Input	W	1,292	1,828	2,257
	Current	A	5.7	7.9	9.7
	SEER	W/W	3.20	3.20	3.20
Moisture Removal		l/h	1.4	1.8	2.8
Max. input consumption		W	1,350	2,050	2,500
Max. current		A	6.4	9.2	11.2
Indoor fan motor	Output	W	20	30	40
	Running current	A	0.2	0.14	0.17
	Capacitor	μF	1.2	/ DC Inverter	/ DC Inverter
	Speed (Turbo/H/M/L)	rpm	1,250/1,200/1,100/1,000	1,300/1,250/1,150/1,050	1,300/1,250/1,150/1,050
Indoor air flow (Turbo/H/M/L)		m³/h	600/550/500/440	800/700/650/600	1,100/1,000/950/900
Indoor noise level (H)		dB(A)	39	46	50
Indoor dimension	Unit (WxHxD)	mm	805×292×200	875×307×217	975×318×220
	Packing (WxHxD)	mm	876×272×365	945×296×390	1,050×301×397
Indoor weight		kg	9.7/11.2	10.3/11.2	11.9/13.9
Compressor	Type		Rotary	Rotary	Rotary
	Rated current(RLA)	A	4.5	6.0	7.4
	Locked rotor Amp(LRA)	A	28.4	40.7	55.0
	Thermal protector		Internal	Internal	Internal
	Capacitor	μF	25	40	40
	Refrigerant oil	ml	SUKIKER JY68B / 240	SUKIKER JY68B / 320	RmM68EA / 450
Outdoor fan motor	Output	W	30	30	50
	Running current	A	0.35	0.35	0.57
	Capacitor	μF	3	3	3
	Speed	rpm	860	860	760
Outdoor air flow		m³/h	2,100	2,400	2,600
Outdoor noise level		dB(A)	53	54	57
Outdoor dimension	Unit (WxHxD)	mm	660×463×245	800×553×280	820×642×306
	Packing (WxHxD)	mm	767×516×335	908×627×405	940×697×390
Outdoor weight		kg	25.2 / 27.0	35.5 / 37.5	42.0 / 44.6
Refrigerant		g	R-32/530	R-32/720	R-32/1,050
Refrigerant pipe	Standard connection length	m	4	4	4
	Additional charge amount	g	20 x (Length m-4)	20 x (Length m-4)	20 x (Length m-4)
	Liquid side /Gas side	mm	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7
	Max. refrigerant pipe length	m	20	20	20
	Max. difference in level	m	10	10	10
Remote setting temperature range		°C	16-30	16-30	16-30
Ambient temperature range (Cooling)		°C	0-43	0-43	0-43
Qty'per 20' & 40'&40HQ		Set	95/195/205	60 /125/140	55/115/125

Nominal testing conditions:

Cooling - Indoor 80.6°F DB / 66.2°F WB (27°C DB / 19°C WB) & Outdoor 95°F DB / 75.2°F WB (35°C DB / 24°C WB)

HIGH WALL R-32 60HZ

Specification

YORK Set Model			YHGF12ZHMDHUORX	YHGF18ZHMDHUORX	YHGF24ZHMDHUORX
YORK Outdoor Model			YHGF12YHMDHUO-X	YHGF18YHMDHUO-X	YHGF24YHMDHUO-X
YORK Indoor Model			YHGF12XHMDHU-RX	YHGF18XHMDHU-RX	YHGF24XHMDHU-RX
Power supply		V/Ph/Hz	230/1/60	230/1/60	230/1/60
Power supply by		Side	Indoor	Indoor	Indoor
Cooling	Capacity	Btu/h	11,942	18,084	22,179
	Capacity	W	3,500	5,300	6,500
	Power Input	W	1,304	1,860	2,208
	Current	A	5.7	8.1	9.5
	SEER	W/W	3.20	3.20	3.20
Heating	Capacity	W	2,800	4,600	5,400
	Input	W	1,120	1,720	2,600
	Current	A	5.0	7.5	11.5
	COP	W/W	3.14	3.07	2.71
Moisture Removal		l/h	1.4	1.8	2.8
Max. input consumption		W	1,350	2,050	2,500
Max. current		A	6.4	9.2	11.2
Indoor fan motor	Output	W	20	30	40
	Running current	A	0.2	0.14	0.17
	Capacitor	µF	1.2	/ DC Inverter	/ DC Inverter
	Speed (SH/H/M/L)	rpm	1,250/1,200/1,100/1,000	1,300/1,250/1,150/1,050	1,300/1,250/1,150/1,050
Indoor air flow (Turbo/H/M/L)		m³/h	600/550/500/440	800/700/650/600	1,100/1,000/950/900
Indoor noise level (H)		dB(A)	39	46	50
Indoor dimension	Unit (WxHxD)	mm	805×292×200	875×307×217	975×318×220
	Packing (WxHxD)	mm	876×272×365	945×296×390	1,050×301×397
Indoor weight		kg	9.7/11.2	10.3/11.2	11.9/13.9
Compressor	Type		Rotary	Rotary	Rotary
	Rated current(RLA)	A	4.5	6.0	7.4
	Locked rotor Amp(LRA)	A	28.4	40.7	55.0
	Thermal protector		Internal	Internal	Internal
	Capacitor	µF	25	40	40
	Refrigerant oil	ml	SUKIKER JY68B / 240	SUKIKER JY68B / 320	RmM68EA / 450
Outdoor fan motor	Output	W	30	30	50
	Running current	A	0.35	0.35	0.57
	Capacitor	µF	3	3	3
	Speed	rpm	860	860	760
Outdoor air flow		m³/h	2,100	2,400	2,600
Outdoor noise level		dB(A)	53	54	57
Outdoor dimension	Unit (WxHxD)	mm	660×463×245	800×553×280	820×642×306
	Packing (WxHxD)	mm	767×516×335	908×627×405	940×697×390
Outdoor weight		kg	26.2 / 27.9	37.0 / 39.2	42.7 / 45.5
Refrigerant		Type/Charge	R-32/530	R-32/720	R-32/1,050
Refrigerant pipe	Standard connection length	m	4	4	4
	Additional charge amount	g	20 x (Length m-4)	20 x (Length m-4)	20 x (Length m-4)
	Liquid side /Gas side	mm	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7
	Max. refrigerant pipe length	m	20	20	20
	Max. difference in level	m	10	10	10
Remote setting temperature range		°C	16-30	16-30	16-30
Ambient temperature range (Cooling/Heating)		°C	0-43/-7-24	0-43/-7-24	0-43/-7-24
Qty' per 20' & 40' & 40HQ		Set	95/195/205	60 /125/140	55/115/125

Nominal testing conditions:

Cooling - Indoor 80.6°F DB / 66.2°F WB (27°C DB / 19°C WB) & Outdoor 95°F DB / 75.2°F WB (35°C DB / 24°C WB)

Heating - Indoor 68°F DB / 59°F WB (20°C DB / 15°C WB) & Outdoor 44.6°F DB / 42.8°F WB (7°C DB / 6°C WB)



INSTALL CONFIDENCE



Johnson Controls, the Johnson Controls logo, YORK are registered trademarks of Johnson Controls, Inc in the United States of America and other countries. Other trademarks used herein may be trademarks or registered trademarks of other companies.

FOR MORE INFORMATION CONTACT [JOHNSONCONTROLS.COM](https://www.johnsoncontrols.com)

© 2025 Johnson Controls, Inc, P.O. Box 423, Milwaukee, WI 53201, All rights reserved worldwide.

PUBL-9202(0125)